

## Article

# Comparing the Sustainability of Different Powertrains for Urban Use

Fabio Cignini <sup>1</sup>, Adriano Alessandrini <sup>2</sup>, Fernando Ortenzi <sup>1,\*</sup>, Fabio Orecchini <sup>3</sup>, Adriano Santiangeli <sup>3</sup>  
and Fabrizio Zuccari <sup>3</sup>

<sup>1</sup> ENEA—Italian Agency for New Technologies, Energy and Sustainable Economic Development, 00123 Rome, Italy

<sup>2</sup> Department of Civil and Environmental Engineering, University of Florence, 50139 Florence, Italy

<sup>3</sup> CARE—Center for Automotive Research and Evolution, DSI—Department of Engineering Sciences, Guglielmo Marconi University, 00193 Rome, Italy

\* Correspondence: fernando.ortenzi@enea.it

**Abstract:** The real environment impacts the fuel and energy consumption of any vehicle: technology, physical and social phenomena, traffic, drivers' behaviour, and so on; many of them are difficult to quantify. The authors' methodology was used to test the real impact of vehicles in "standard" urban conditions, and many generations of hybrid powertrains are compared. One of the latest performance indexes is the percentage of time the vehicle runs with zero emissions (ZEV). For example, the hybrid vehicle tested ran up to 80% with no emissions and fuel consumption below 3 L per 100 km. A few energy performance indicators were compared between five vehicles: one battery electric vehicle (BEV), two hybrid gasoline–electric vehicles (HEVs), and two traditional vehicles (one diesel and one gasoline). Their potential to use only renewable energy is unrivalled, but today's vehicles' performances favour hybrid power trains. This paper summarises the most sustainable powertrain for urban use by comparing experimental data from on-road testing. It also evaluates the benefits of reducing emissions by forecasting the Italian car fleet of 2025 and three use cases of the evolution of car fleets, with a focus on Rome.

**Keywords:** hybrid; electric; sustainability; car fleet forecasting; well to wheel



**Citation:** Cignini, F.; Alessandrini, A.; Ortenzi, F.; Orecchini, F.; Santiangeli, A.; Zuccari, F. Comparing the Sustainability of Different Powertrains for Urban Use. *Electronics* **2023**, *12*, 941. <https://doi.org/10.3390/electronics12040941>

Academic Editor: Erik Schaltz

Received: 9 January 2023

Revised: 10 February 2023

Accepted: 10 February 2023

Published: 13 February 2023



**Copyright:** © 2023 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

The European Green Deal commits the 27 EU member states to reducing their emissions by at least 55% by 2030 compared to 1990 levels. The European Commission's targets for reducing CO<sub>2</sub> emissions from new cars and vans include, by 2030, a 55% reduction for cars and 50% for non-passenger vehicles (NPVs). The Commission promotes the market's growth for zero-emission and low-emission vehicles [1]. The EU has set 2050 as the date for carbon neutrality, that is, for an economy with net greenhouse gas emissions equal to zero. This goal is the core of the European Green Deal and aligns with the EU's commitment to global climate action under the Paris Agreement [2].

Road transport was responsible for 31% of fuel consumption in 2016 (passenger cars and motorcycles represent about 50% of the transport sector) [3]. In 2020, this sector contributed about one-fifth of the EU's total emissions of carbon dioxide (CO<sub>2</sub>), the leading greenhouse gas (GHG), 75% of which originates from passenger cars [4]. Therefore, in line with the EU Green Deal objectives (2030–2050), this work analyses possible solutions for reducing greenhouse gas (GHG) emissions due to road transportation, with particular attention to cars. From a long-term perspective (2030–2050), the EU Green Deal objectives foresee the development of an adequate charging infrastructure network. Therefore, it may increase the advantages for BEVs, significantly reducing the consumption of non-renewable primary energies and GHG emissions linked to the "new" car fleet.

The proposed analysis evaluates the effects of the proposed intervention in terms of the following:

- Global effects of assessing the consumption of non-renewable primary energy (NRPE) and GHG emissions;
- local polluting emissions such as CO, NO<sub>x</sub>, NO<sub>2</sub>, NH<sub>4</sub>, volatile organic compounds (VOCs), CH<sub>4</sub>, and PM.

The proposed study is based on the results of the performance analysis of the latest generation of vehicles under actual conditions of use, like other works conducted by the research group [5–7]. The vehicle choice is limited to availability for tests.

This analysis is based on data acquired in several experimental on-road testing campaigns; the vehicles compared are

- Toyota Prius Hybrid 2016;
- Toyota Yaris Gasoline 2017;
- Toyota Auris Diesel 2017;
- Nissan Leaf 2018;
- Toyota Yaris Hybrid 2020.

The NRPE and WTW calculated for these vehicles have been used to evaluate the impacts of vehicle replacement in a few future scenarios, by applying the average value to the relative vehicle category (size and fuel type); the one without any experimental data used average values from the literature.

This study comments on the possible reduction in emissions obtainable through converting a part of the circulating car fleet. As for the global effects, the well-to-wheel (WTW) analysis shows that for the present electric mix in the EU, the performance of hybrid vehicles is substantially similar to that of battery electric vehicles (BEV) [8].

The energy transition towards producing electricity mainly from renewable sources is a process that has already begun but will require a longer time. In the short term, replacing older vehicles with BEVs is unrealistic due to the actual electricity production amount and mix. It would not bring advantages in reducing NRPE and GHG emissions; moreover, it would require an affordable and well-dimensioned infrastructure with many charging stations (in terms of numbers and charging types).

The evolution of the Italian car fleet can be applied to the case study of the province of Rome. A few hypotheses of older vehicle replacement allow for assessing the impact on NRPE and GHG emissions without any need for additional infrastructure, and it considers which solution will better tackle the challenge of climate change. The first and second replacement hypotheses follow the scrappage schemes used to promote car turnover, similar to past initiatives made by the Italian government; the third one is the market evolution without any push measure or national program.

The paper is divided into five sections: this introduction, the WTW analysis, the car fleet analysis, the results, and the conclusions.


## 2. WTW Analysis

The WTW analysis concerns the well to tank (WTT) and the tank to wheel (TTW). Both take care of the global effects (consumption NRPE and GHG emissions) of full hybrid (HEV) and electric (BEV) vehicles [9].

The WTW analysis is divided into two sub-parts: WTT and TTW.

### 2.1. Well To Tank (WTT)

The well-to-tank analysis of the electricity considers the GHG emissions of the electric production Italian mix and the electricity conversion in the electric charging stations, which depends on the average efficiency of the charging system [10], as reported in Figure 1.

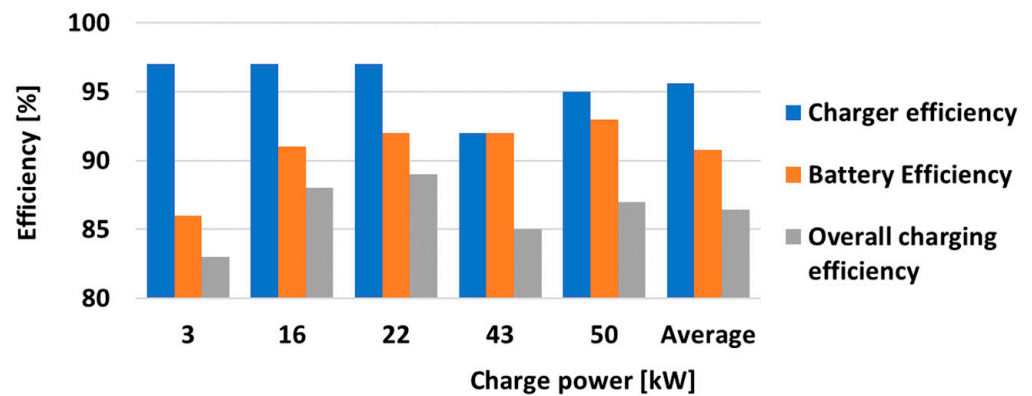


**Figure 1.** Charger efficiency, battery efficiency, and overall charging efficiency by the power of the charging system (with average values).

As reported in [11], Figure 2 shows the energy conversion of electricity, the conversion of 3.165 MJ as input (kinetic, potential, or chemical) to electric energy results in 1.287 MJ. Then, after the transport, transformation, and distribution, it remains at 1.149 MJ, and the energy stored in the vehicle battery is 1.000 MJ.



**Figure 2.** Well-to-tank analysis of electricity considering the charging device [12].

Similarly, Figure 3 shows the WTT analysis for the NRPE (fuels): gasoline and diesel; both pass through crude oil extraction and transport and then oil refining and distribution. Therefore, to produce 1.000 MJ of energy usable from a vehicle, as is known, gasoline requires 1.155 MJ of NRPE and 1.176 MJ of diesel. Furthermore, electricity production is more impactful, requiring more NRPE than fuels to reach the target of 1.000 MJ (available for direct consumption in vehicle storage).

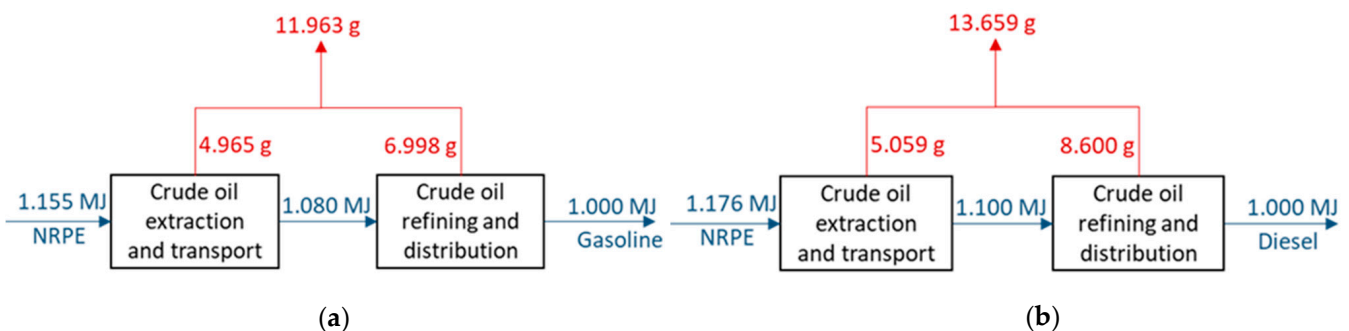

**Figure 3.** WTT analysis for gasoline (a) and diesel (b) [12].

So, Table 1 reports the GHG WTT emission factor (EF) for each fuel type, including electricity ([12–14]). It varies yearly due to the growth of renewable energy production facilities (solar panels and wind generators), which reduce the weight of non-renewable and more polluting production in the energy-production mix.

**Table 1.** WTT Emission Factor (kgCO<sub>2</sub>/kWh).

Fuel	EF
Electricity	0.276
Diesel	0.264
Gasoline	0.265
Natural Gas (CNG)	0.210
LPG	0.190

## 2.2. Tank To Well (TTW)

The on-road testing campaigns allow data to be acquired to measure the performance of vehicles through the on-board diagnostic (OBD) plug [15,16]. Table 2 shows the average energy consumption values of the vehicles considered in this paper.

**Table 2.** Energy consumption in real drive conditions for HEV and BEV.

Vehicle	Fuel	Consumption (MJ/km)
Toyota Prius Hybrid 2016	HEV—Gasoline	1.099
Toyota Yaris Hybrid 2020	HEV—Gasoline	1.055
Toyota Yaris Hybrid 2017	Gasoline	2.637
Toyota Auris 2017	Diesel	2.220
Nissan Leaf	BEV	0.456

Table 2 values came from [8] for the BEV, [5] for the HEVs, and [6,7] for traditional ones (gasoline and diesel). Many literature sources study vehicle consumption in real conditions; [17–21] are only a few of them, and all evaluations deliver comparable values to those reported. Therefore, those values can be applied to the relative vehicle types in the replacement scenarios, while the types without any experimental data use the literature EFs.

Each vehicle has evaluated the local emission at the tailpipe with a simplified TIER3 (COPERT, [22]); the cold start and milage deterioration have been considered negligible.

Equation (1) allows the evaluation of each pollutant's emission factor (EF, measured in g/km); depending on the road arc's average speed, it allows the evaluation of a kinematic sequence (KS) emission [22]. Each category has its range of validity and its coefficients, with a constant EF when the average speed of the arc (or KS) is below a minimum value.

$$EF = \frac{\left(\alpha \cdot V^2 + \beta \cdot V + \gamma + \frac{\delta}{V}\right)}{(\varepsilon \cdot V^2 + \zeta \cdot V + \eta)} \cdot (1 - RF) \quad (1)$$

The method prescribes all coefficients  $\alpha$ ,  $\beta$ ,  $\gamma$ ,  $\delta$ ,  $\varepsilon$ ,  $\zeta$ ,  $\eta$ , and a reduction factor (RF) for all categories of vehicles. Equation (1) aims to calculate the specific EF of all KSs.

A KS is a sequence of road arcs, a portion of the driving cycle (DC) that starts and ends when the vehicle is steady. Each sequence has a similar driving style and driver behaviour; the route has the same characteristics (in orography and road regulation) [23]. The paper [24] describes how to divide the DC into KSs, which is partly introduced in [25–28]. The on-road testing campaign characterises each sequence regarding driver attitude, vehicle performance, and non-renewable primary energy (NRPE).

Table 3 reports the EF for each vehicle tested in previous works, the fuel type, EURO standard, distance travelled (km), and the tank-to-wheel (TTW) emission factors for primary pollutants (CO, NO<sub>x</sub>, VOC, CH<sub>4</sub>, PM, and GHG). The measuring units of all pollutants and GHG emissions are g/km. The electric vehicle (Nissan Leaf) has no TTW emissions.


**Table 3.** TTW Emission factors of the vehicle models (electric vehicle excluded) tested by the authors.

Veh.	Fuel	EURO	km	CO	NOx	VOC	CH <sub>4</sub>	PM	GHG
Y20	Hybrid-Gas.	6d-temp	2284	0.03815	0.01276	0.00078	0.00339	0.00014	77.3
P17	Hybrid-Gas.	6c	1521	0.03226	0.01427	0.00070	0.00383	0.00014	107.7
Auris 17	Diesel	6a	761	0.03057	0.45643	0.00097	0.00001	0.00014	174.2
Yaris 17	Gasoline	6a	119	0.03790	0.51583	0.00114	0.00003	0.00014	209.1

The vehicle number forecasting of the next section also considers methane-powered vehicles, so those powertrains that have not been tested with the same used the EF from the literature. GHG emissions include many pollutants, and the World Meteorological Organization (WMO) measures the concentrations of a few of those that are rising: carbon dioxide (CO<sub>2</sub>), methane CH<sub>4</sub>), nitrous oxide (NO<sub>x</sub>), hydrochlorofluorocarbons (HCFCs), hydrofluorocarbons (HFCs), and ozone in the lower atmosphere.

### 2.3. WTW Analysis Results

Figure 4 reports the whole WTW analysis by summing both contributions of WTT and TTW emissions. It includes two graphs: the specific consumption of NRPE (a) and the GHG emissions (b).

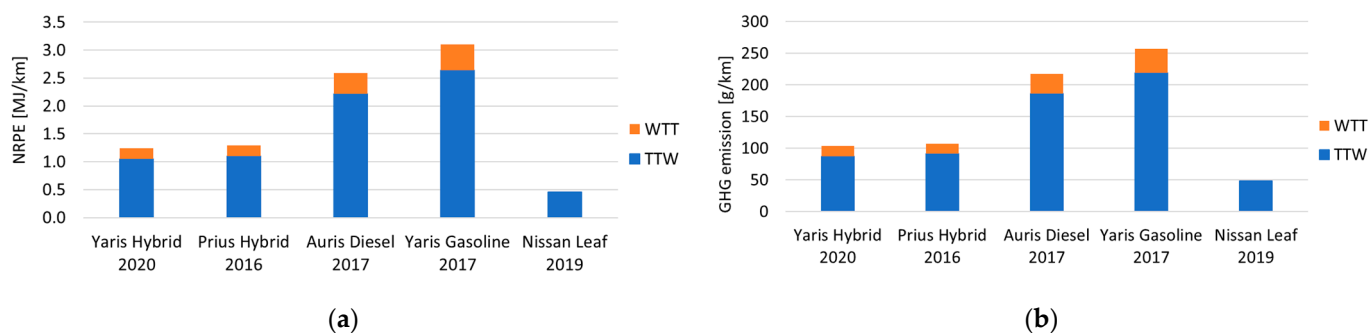**Figure 4.** Specific NRPE (a) and specific GHG emission (b) of the vehicles analysed.

The NRPE, evaluated from the OBD plug, of BEV vehicles exceeds 39% of the HEV ones. In comparison, GHG emissions are substantially the same, and the BEV emits 53% less than HEV.

## 3. Car Fleet Analysis

This paper proposes a study of today's Italian circulating car fleet and a near-future forecast (up to 2025). The EU does not yet define the EURO 7 pollutant limits, which will be required by 2025, so further forecasting (from 2026 onwards) could be unreal. Then, we evaluate the case study of Rome province by applying the market evolution of the Italian fleet. This evaluation aims to understand the benefits of hybrid and electric vehicles when they replace the oldest technologies and older EURO standards in five years.

This chapter concerns the Italian car fleet forecasting, the circulating car fleet of Rome province, and the Rome car fleet of 2025.

### 3.1. Italian Car Fleet Forecasting

The average replacement time of Italian vehicles is 7.5 years (1.5 million cars scrapped per year, 3.8% of the Italian fleet), which can be increased with national incentives up to 2.1 million as happened in 2021 (5.3%) [29]. This study is based on Automobile Club d'Italia (ACI) data [30]. The Rome province fleet ranges from 100 to 145 thousand vehicles scrapped annually.

Table 4 shows the distribution of scrapped vehicles for 2021 in Italy, divided by vehicle size and EURO standard.

**Table 4.** Distribution of the scrapped vehicles for 2021 in Italy by size and EURO standard.


Vehicle Size	EURO 0	EURO 1	EURO 2	EURO 3	EURO 4	EURO 5	EURO 6	TOTAL
Small	14,542	26,298	179,136	186,371	298,576	33,703	16,629	755,255
Medium	2594	9321	85,279	182,641	204,635	60,773	62,985	608,228
Large	889	1301	9514	27,950	28,644	13,407	14,991	96,696
TOTAL	16,815	37,294	274,188	363,938	414,947	81,141	92,585	1,460,241
	1.2%	2.5%	18.8%	27.2%	36.4%	7.4%	6.5%	

Table 5 reports the circulating Italian car fleet from 2015 to 2021, divided by fuel (methane-powered vehicles and gasoline–methane are counted in the same category). Assumptions in the event of more drastic political choices may considerably differ from these projections. Figure 5 shows the vehicle trends; each curve fits with a polynomial function (Equation (2)).

$$y = a \cdot x^4 + b \cdot x^3 + c \cdot x^2 + d \cdot x + e \tag{2}$$

**Table 5.** Circulating car fleet in Italy of 2021.

Year	Gasoline	Gasoline-LPG	Gasoline-CNG	Diesel	Gasoline-Electric	Diesel-Electric	Electric
2015	18,568,405	2,137,078	883,190	15,666,309	82,381	2967	4584
2016	18,360,105	2,211,368	904,947	16,260,625	117,433	-	5743
2017	18,196,563	2,309,020	926,704	16,896,736	174,087	3405	7560
2018	18,083,402	2,409,840	945,184	17,316,888	239,779	4705	12,156
2019	18,174,338	2,574,287	965,340	17,467,776	316,209	18,359	22,728
2020	18,072,495	2,678,656	978,832	17,385,843	501,868	40,860	53,079
2021	17,806,656	2,782,057	984,964	17,093,277	927,006	104,488	118,034

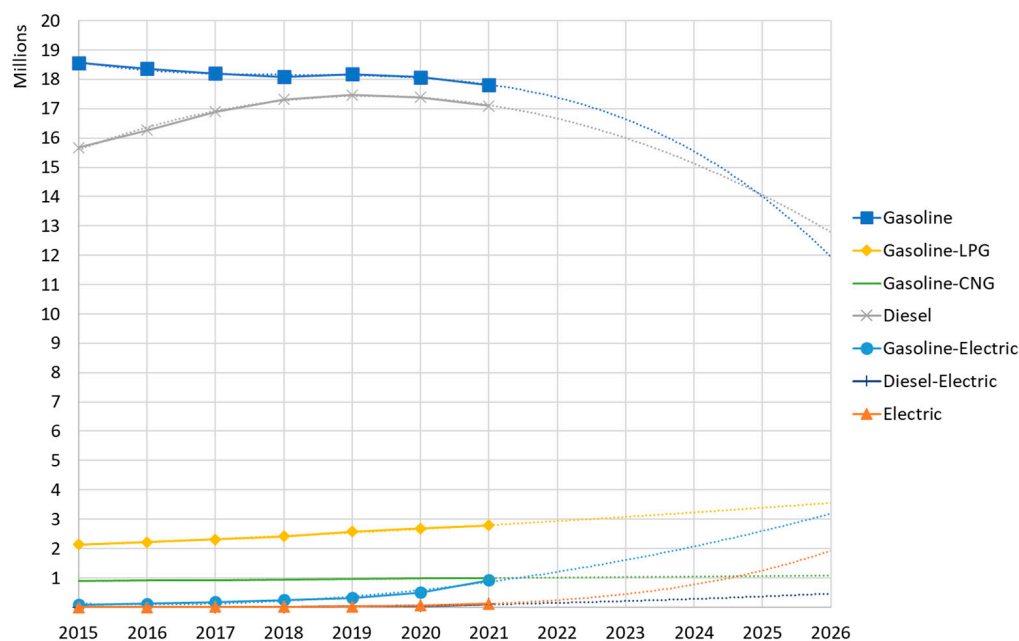

**Figure 5.** Trends of vehicles divided by fuel.

Table 6 describes the coefficients of Equation (2) and their correlation factor  $R^2$ , while Table 7 compares vehicles between 2021 values and the 2025 forecasting. It shows a remarkable rise in gasoline CNG, HEV, and BEV numbers (almost 180% and more), with a slight increase in gasoline LPG ones (22%) and a steady or moderate decrease in gasoline and diesel ones (respectively 1% and 22% reduction).



**Table 6.** Fit line coefficients by fuel.

Fuel	R <sup>2</sup>	a	b	c	d	e
Gasoline	0.869	-	1.692	$-5.147 \times 10^3$	0.000	$7.075 \times 10^9$
Gasoline-LPG	0.993	-	-	$3.648 \times 10^3$	$-1.461 \times 10^7$	$1.463 \times 10^{10}$
Gasoline-CNG	0.997	-	-	-	$-1.460 \times 10^{-1}$	$3.596 \times 10^6$
Diesel	0.963	-	-	$-1.019 \times 10^5$	$4.117 \times 10^8$	$-4.156 \times 10^{11}$
Gasoline-Electric	0.997	-	-	$3.115 \times 10^4$	$-1.256 \times 10^8$	$1.266 \times 10^{11}$
Diesel-Electric	0.948	-	-	$5.395 \times 10^3$	$-2.176 \times 10^7$	$2.194 \times 10^{10}$
Electric	0.956	-	1.862	$-5.631 \times 10^3$	0.000	$7.633 \times 10^9$

**Table 7.** Italian vehicle numbers prediction for 2025 against 2021.

Fuel	2021	2025	Diff. %
Gasoline	17,806,656	17,689,443	-1%
Gasoline-LPG	2,782,057	3,391,021	22%
Gasoline-CNG	984,964	3,595,401	265%
Diesel	17,093,277	14,057,825	-18%
Gasoline-Electric	927,006	2,600,110	180%
Diesel-Electric	104,488	366,938	251%
Electric	118,034	398,848	238%

Table 8 provides the average distance travelled divided by fuel [31] with forecasting in the following decades. The annual average distance for electric and hybrid vehicles is assumed to equal to that of gasoline vehicles. In contrast, the LPG vehicles do not have a reference value, so the average value between diesel and gasoline annual distances has been hypothesised (10,650 km per year).

**Table 8.** Average distance travelled for gasoline and diesel vehicles, km per year.

Fuel	2010	2015	2016	2020	2025	2030
Gasoline	8980	7320	7380	7100	7000	6900
Diesel	17,250	14,000	14,060	14,250	14,480	14,700

### 3.2. Circulating Car Fleet of Rome Province

The ACI provides vehicle numbers divided by EURO standard and fuel [30]. Table 9 reports vehicle numbers of Rome province in 2021; a few thousand vehicles are non-classified in the EURO standard and do not have one of the main standard fuel/powertrains cited in Table 9, so they are neglected.

**Table 9.** Vehicle number divided by EURO standard and fuel for Rome province (2021).

EURO	Gasoline	Gasoline-LPG	Gasoline-CNG	Diesel	Gasoline-Electric	Diesel-Electric	Electric	Total
E0	191,557	13,822	546	36,799	5	1	-	242,730
E1	41,219	3636	166	7834	-	-	-	52,855
E2	120,760	9328	423	33,766	1	-	-	164,278
E3	119,846	8292	572	131,635	-	3	-	260,348
E4	318,877	70,613	8097	288,821	555	-	-	686,963
E5	180,652	44,653	6326	239,824	5670	120	-	477,245
E6	348,862	96,898	7105	280,766	88,486	5090	-	827,207
NC	-	-	-	-	-	-	10,805	10,805
<b>Total</b>	<b>1,321,773</b>	<b>247,242</b>	<b>23,235</b>	<b>1,019,445</b>	<b>94,717</b>	<b>5214</b>	<b>10,805</b>	<b>2,722,431</b>

Figure 6 shows the principal distributions with percentage values divided by fuel (a) and the EURO standard (b). The source provides for each category the vehicle size as requested by the COPERT model (small, medium, and large).

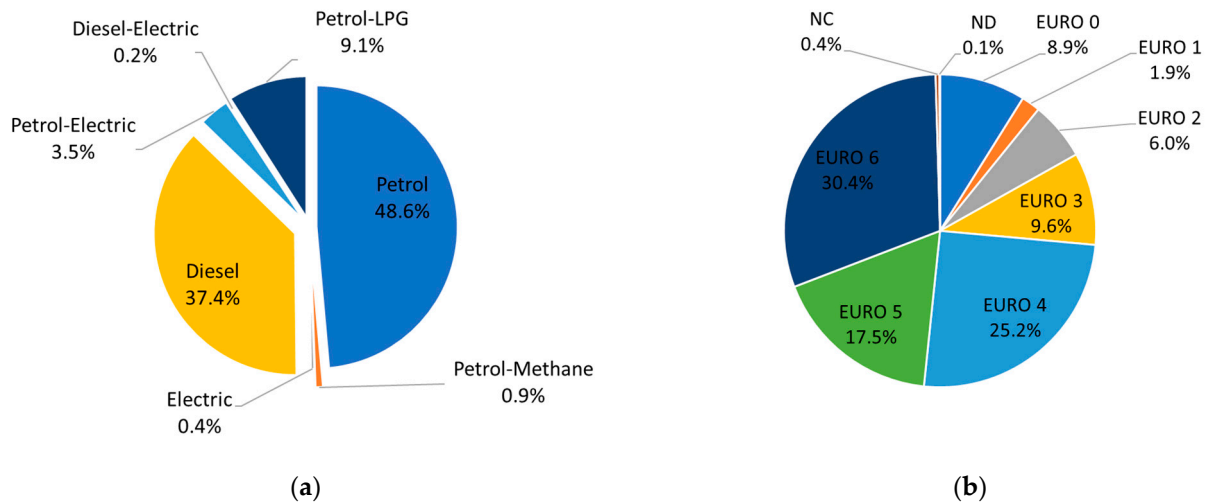


Figure 6. Vehicle distribution by fuel (a) and by EURO (b).

3.3. The Rome Car Fleet of 2025

The forecasting of 2025 emissions is hypothesised in three scenarios:

- Scrapping of EURO 0 to EURO 2 vehicles (affecting 17% of the circulating fleet);
- Scrapping of EURO 0 to EURO 3 vehicles (affecting 27% of the circulating fleet);
- Market evolution accordingly to the Italian trend.

Table 10 shows the forward-looking car fleet of 2025 divided by EURO, fuel, and vehicle size in the case of actual market evolution without any further push measures for the scrapping.

Table 10. Rome car fleet adopted with the third scenario until 2025.

Fuel	Size	EURO 0	EURO 1	EURO 2	EURO 3	EURO 4	EURO 5	EURO 6	NC
Gasoline	S	134,151	21,331	71,903	73,148	178,464	155,753	477,005	
	M	39,700	13,791	23,253	12,034	20,743	10,335	53,316	
	L	8311	2083	2949	2084	3527	1215	7877	
Gasoline-LPG	S	5847	931	1762	1351	9530	27,996	196,127	
	M	6582	2108	2056	845	1839	4801	35,691	
	L	721	244	245	135	168	51	2327	
Gasoline-CNG	S	255	40	77	58	1018	4519	65,133	-
	M	243	98	97	99	285	128	12,001	-
	L	22	12	10	4	20	7	681	-
Diesel	S	3613	145	167	5426	12,989	35,928	115,169	
	M	14,340	2998	8063	19,336	21,852	97,616	401,146	
	L	10,840	2672	3866	5671	3968	11,552	61,051	
Gasoline-Electric	S	-	-	-	-	6	302	101,059	
	M	5	-	-	-	60	3775	143,044	
	L	1	-	-	2	25	95	17,295	
Diesel-Electric	S	-	-	-	-	-	-	4	
	M	-	-	-	-	-	93	14,839	
	L	1	-	-	2	-	19	3353	
Electric		-	-	-	-	-	-		35,811



- The scenarios mentioned above are only a few of the possible ones. The first and second involve more pollutant vehicles with scrappage schemes used to promote car turnover similar to past initiatives made by the Italian government; they assume the replacement of vehicles by maintaining the same power supply, using the hybrid version (if available). Thus, gasoline will become a gasoline–electric hybrid, and diesel will be a EURO 6 diesel. Hybrid diesel still does not have the same market appeal as hybrid gasoline (HEV), and there is not enough vehicle availability to be a suitable substitution in most cases. The third scenario aims to compare previous schemes with no other national policies. It follows the market evolution, for example, the same proportion of the national car fleet trend and the same scrapping rate.

The peculiarities of these projections are as follows:

- Each year there are many scrapped vehicles in all EURO categories (even in EURO 6), following the proportion shown in Table 4;
- The new vehicles have the latest EURO standard;
- Each fuel category has a defined proportion by size; it is assumed to be the same as the 2021 car fleet.

#### 4. Results

The results compare the emissions of Rome’s car fleet in 2021 with the forecasting of 2025 within the three scenarios proposed.

##### 4.1. Actual Rome Car Fleet Emissions

Figure 7 shows emissions evaluation in tons with a logarithmic scale for the circulating car fleet in Rome province (2.7 Mln vehicles) in 2021. The main fuel types are gasoline, LPG, CNG (methane), and diesel. The figure shows the impact of fuel on pollutants and fuel consumption (FC or NPRE). The emissions are calculated by multiplying the car fleet in Table 10 by the average annual distance as in Table 8 and by the relative EFs in Table 3.

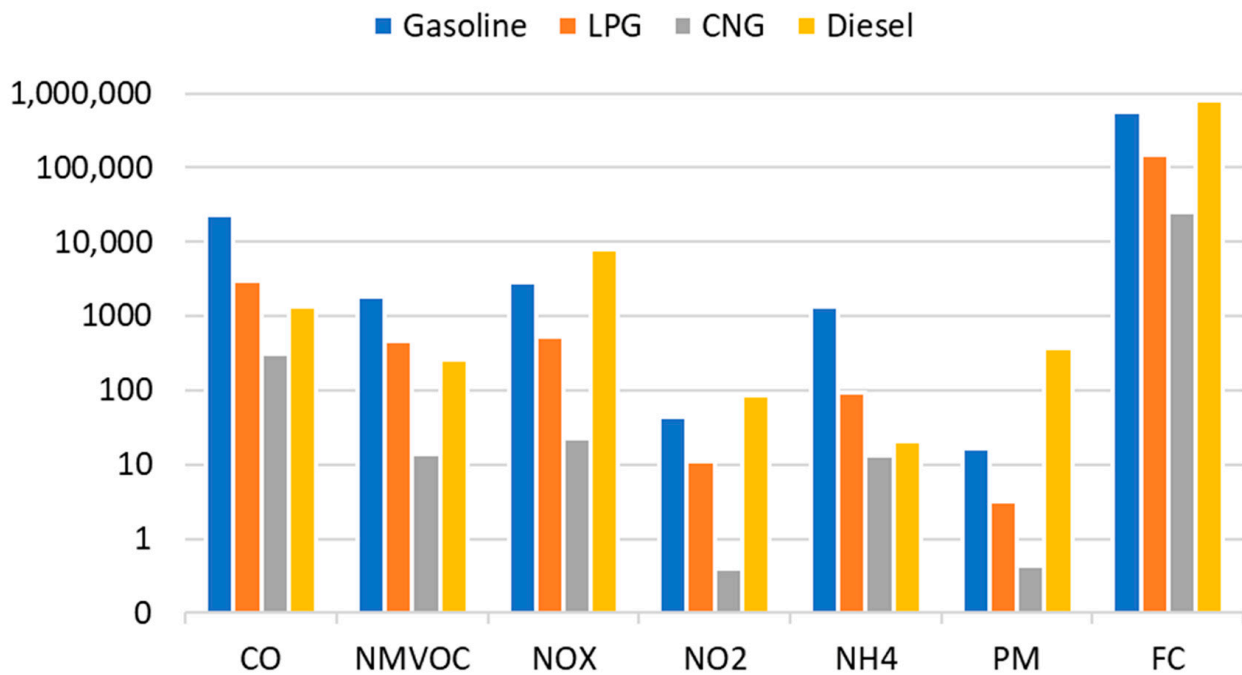


Figure 7. Emissions and FC divided by fuel type in 2021.

#### 4.2. Emissions of the 2025 Car Fleet

Table 11 shows the pollutant emissions, fuel consumption (FC or NRPE), and CO<sub>2</sub> (WTW) for each scenario hypothesised (values in tons; if the fuel is electricity, the unit is MWh).

**Table 11.** Three scenarios emissions and fuel consumption evaluation up to 2025; values in tons (kWh if the fuel is electricity).

Scenario		CO	VOC	NO <sub>x</sub>	NO <sub>2</sub>	NH <sub>4</sub>	PM	FC or NRPE	CO <sub>2</sub> TTW	CO <sub>2</sub> WTT
1st	New fleet	150	11	222	5	84	2	129,266	34,182	407,569
	Avoided	17,696	1574	2935	29	1074	157	105,015	27,815	331,107
	Av./tot (%)	63.7%	60.9%	25.8%	21.1%	74.7%	40.6%	6.9%	7.0%	6.9%
2nd	New fleet	271	27	552	13	116	5	254,014	67,135	800,894
	Avoided	19,432	1674	3873	35	1073	228	139,160	36,854	438,764
	Av./tot (%)	70.0%	64.7%	34.1%	25.3%	74.7%	59.0%	9.1%	9.3%	9.1%
3rd	New fleet	25,847	2415	9101	104	1407	178	1,480,791	382,190	4,508,527
	Avoided	1932	171	2268	36	30	209	40,226	14,131	287,163
	Av./tot (%)	7.0%	6.6%	20.0%	25.6%	2.1%	54.0%	2.6%	3.6%	6.0%

The table above reports the emissions of the new car fleet in 2025, the emissions avoided, and the percentage avoided compared with the total emissions of 2021 (Av./tot %). Negative values of this percentage mean bad results with rising relative pollutants.

The new fleet values came from the vehicle replacement results, so the second scenario involves more vehicles than the first one (the first involves EURO 0 to EURO 2, while the second is up to EURO 3). The new fleet of the third scenario means the whole circulating fleet.

The first and second scenarios show the highest reduction for almost all pollutants, and the third scenario has fewer impacts on fuel consumption and GHG. Those three scenarios involve the same number of vehicles, but each has a different fuel and EURO standard proportion.

The first two scenarios hypothesised a more significant replacement of the oldest vehicles (EURO 0 and 1) with the same numbers as the others. The first involves 19% and the second 31% of total circulating vehicles. The third scenario maintains many of the oldest technologies with many replacements in the middle ones (from EURO 0 to EURO 3), which are greater in number and still polluting. Indeed, they avoid 6.9%, 9.1%, and 2.6% of NRPE, respectively. At the same time, CO<sub>2</sub> decreased by 6.9%, 9.2%, and 5.8% in the whole WTW cycle.

The third scenario avoids only 2% of NH<sub>4</sub> and 6.6% of VOC, and 7% of CO, while significantly reducing PM (54%).

## 5. Conclusions and Future Developments

The present paper analyses possible solutions for reducing greenhouse gas (GHG) emissions due to road transportation, with particular attention to cars. It bases the evaluation on experimental data acquired in previous projects; thus, few innovative vehicles are evaluated in terms of emissions and fuel or energy consumption.

A WTW analysis allows the evaluation of GHG emissions from these recent power-trains: hybrid, electric, diesel, and gasoline. All of them had been tested in real on-road driving (some in previous works). Therefore, it allows for comparing the impacts of different scenarios for fleet replacement.

The manuscript compares the Italian circulating car fleet and forecasts for the next five years; this evaluation is obtained through interpolation with polynomial curves fitted in the last five years' open data. This projection foresees the following:

- A sharp increase in HEVg (gasoline–electric), HEVd (diesel–electric), and BEV sectors by 180%, 251%, and 238%, respectively;
- A moderate rise in bi-fuel gasoline–LPG by 22% and gasoline–CNG by 265%;
- A slight decrease in gasoline (1%) and diesel vehicles (18%).


Then, the obtained forecasting was applied to the case study of Rome province with three replacement scenarios:

- First, scrapping of EURO 0 to 2 vehicles involving 19% of the whole circulating car fleet;
- Second, scrapping of EURO 0 to 3 vehicles involving 31% of the whole circulating car fleet;
- Third, actual market growth equal to the Italian trend.
- The manuscript has hypothesized only a few scenarios of the possible ones to exemplify a comparison method. The first and second involve more pollutant vehicles with scrapping schemes similar to past initiatives made by the Italian government; they assume the replacement of vehicles by maintaining the same power supply, using the hybrid version (if available). The third scenario represents no specific national policy that follows the Italian market evolution of 2021.


The case study results are:

- The GHG and the NRPE reductions are between 7% and 3%;
- The scrapping of EURO 0 to EURO 2 vehicles guarantees a significant reduction in CO, VOC, NO<sub>x</sub>, and PM;
- The third scenario (market growth) has less benefit in pollution reduction, but it has a more significant impact on reducing the FC (with respect to the first and second scenarios).

In the long-term perspective of decarbonising the energy mix (see Figure 8, [29]), BEV vehicles' performance in terms of WTW analysis will significantly improve (Figure 9). As shown in Figure 9, the long-term replacement of the vehicle fleet with BEV vehicles (2030–2050) could have considerable advantages regarding NRPE consumption and GHG emissions.

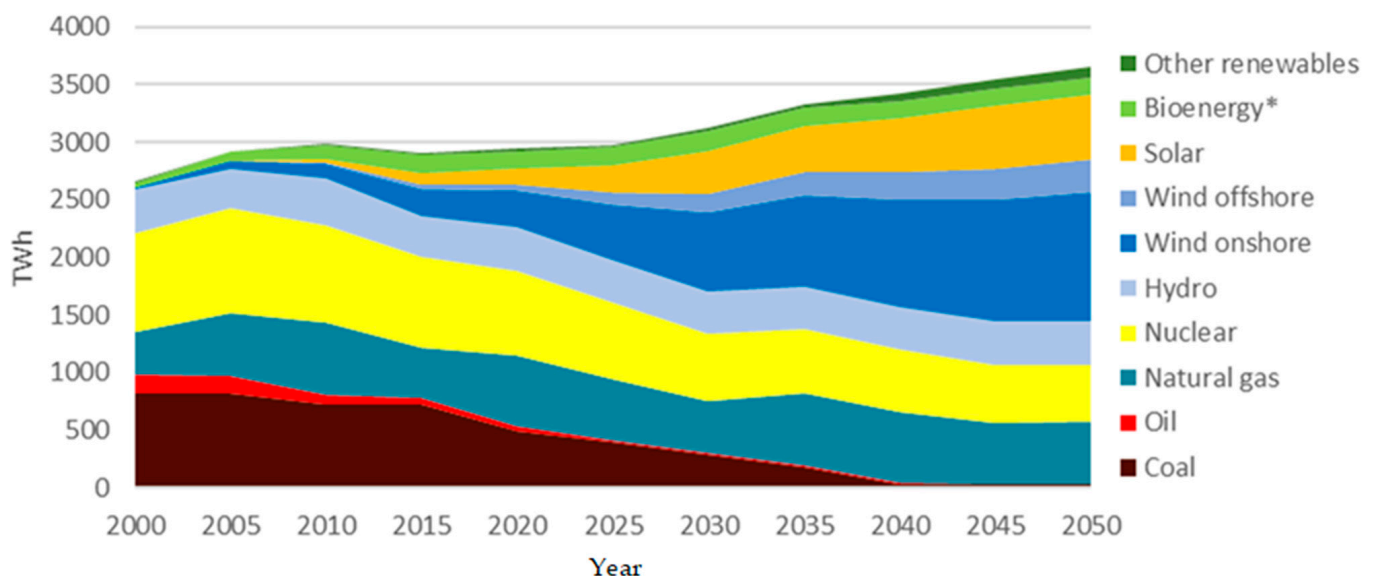

**Figure 8.** Gross electricity generation by year and power plants, the \* represents renewable energy generated through biomass fuel burning.

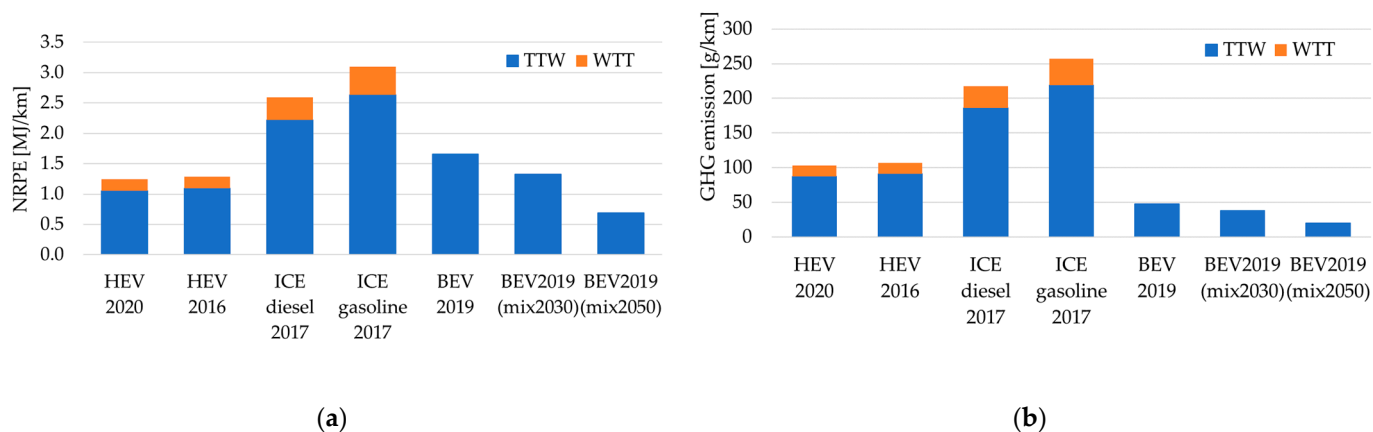

**Figure 9.** Specific non-renewable energy consumption (a) and specific GHG emission (b) for HEV, BEV (current mix), BEV (mix 2030), and BEV (mix 2050).

In the 2030 EU electricity production scenario [32], the non-renewable primary energy consumption of BEV vehicles compared to the (current) HEVs would go from +54% to +3%; in the 2050 scenario, it would reach −30%. As for GHG emissions, the variation goes from −4% to −42% in 2030 to −67% in 2050.

Further development of this study can come from the updating of

- Simulations with the next EURO 7 standard;
- Experimental data of biogenic fuels and other powertrains (hybrid or not);
- Emissions relative to the production mix of 2021 and 2022 (the recent rise in energy prices pushes the installation of renewable production plants and reduces the GHG emissions of energy usage);
- User acceptance of new technologies and market analysis will allow understanding of people's choices for vehicle replacement (e.g., someone could replace an obsolete diesel vehicle with a BEV or a methane one);
- Analysis of transport behaviour with the distance travelled annually divided by the fuel and vehicle category.

Those developments address a new evaluation of NRPE and GHG reduction so that they might produce results and approaches with more adherence to reality.

**Author Contributions:** Conceptualisation and methodology, A.A. and F.C.; data analysis, F.C. and F.O. (Fernando Ortenzi); WTW analysis, A.S. and F.Z.; writing, F.C.; coordination and supervision, A.A. and F.O. (Fabio Orecchini). All authors have read and agreed to the published version of the manuscript.

**Funding:** This research received no external funding.

**Data Availability Statement:** Not applicable.

**Acknowledgments:** The authors thank TMI (Toyota Motor Italia) and TME (Toyota Motor Europe). They have collaborated in the realisation of the study underlying this work by providing vehicles for the tests, software, and hardware for data acquisition.

**Conflicts of Interest:** The authors declare no conflict of interest. The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript; or in the decision to publish the results.

## Abbreviations

Abbreviation	Description
ACI	Automobile Club d'Italia
BEV	Battery Electric Vehicle
CH <sub>4</sub>	Methane
CNG	Compressed Natural Gas
CO	Carbon Oxide
CO <sub>2</sub>	Carbon Dioxide
COPERT	The EU standard vehicle emissions calculator
DC	Driving Cycle
EF	Emission Factor
GHG	Greenhouse Gas
HCFC	Hydrochlorofluorocarbons
HEV	Hybrid-electric Vehicle
HFC	Hydrofluorocarbons
KS	Kinematic Sequence
LPG	Liquid Petroleum Gas
NH <sub>4</sub>	Ammonia
NO <sub>2</sub>	Nitrogen Dioxide
NO <sub>x</sub>	Nitrogen Oxide
NPV	Non-Passenger Vehicle
NRPE	Non-Renewable Primary Energy
OBD	On-Board Diagnostic
PM	Particulate Matter
TTW	Tank To Wheel
VOC	Volatile Organic Compound
WMO	World Meteorological Organization
WTT	Well To Tank
WTW	Well To Wheel
ZEV	Zero Emission Vehicle

## References

1. European Commission. Delivering the European Green Deal. 2021. Available online: [https://ec.europa.eu/info/strategy/priorities-2019-2024/european-green-deal/delivering-european-green-deal\\_en](https://ec.europa.eu/info/strategy/priorities-2019-2024/european-green-deal/delivering-european-green-deal_en) (accessed on 13 December 2021).
2. European Commission. 2050 Long-Term Strategy. 2021. Available online: [https://ec.europa.eu/clima/eu-action/climate-strategies-targets/2050-long-term-strategy\\_it](https://ec.europa.eu/clima/eu-action/climate-strategies-targets/2050-long-term-strategy_it) (accessed on 29 December 2021).
3. Capros, P.P. EU Energy, Transport and GHG Emissions—Trends to 2050. 2016. Available online: [http://pure.iiasa.ac.at/id/eprint/13656/1/REF2016\\_report\\_FINAL-web.pdf](http://pure.iiasa.ac.at/id/eprint/13656/1/REF2016_report_FINAL-web.pdf) (accessed on 13 January 2022).
4. European Environment Agency (EEA). Greenhouse Gas Emissions by Aggregated Sector. 2019. Available online: [www.eea.europa.eu/data-and-maps/daviz/ghg-emissions-by-aggregated-sector-5#tab-dashboard-02](http://www.eea.europa.eu/data-and-maps/daviz/ghg-emissions-by-aggregated-sector-5#tab-dashboard-02) (accessed on 10 January 2022).
5. Orecchini, F.; Santiangeli, A.; Zuccari, F.; Alessandrini, A.; Cignini, F.; Ortenzi, F. Real Drive Truth Test of the Toyota Yaris Hybrid 2020 and energy analysis comparison with the 2017 model. *Energy* **2021**, *14*, 8032. [\[CrossRef\]](#)
6. Orecchini, F.; Santiangeli, A.; Zuccari, F. Hybrid-electric system truth test: Energy analysis of Toyota Prius IV in real urban drive conditions. *Sustain. Energy Technol. Assess.* **2020**, *37*, 100573. [\[CrossRef\]](#)
7. Orecchini, F.; Santiangeli, A.; Zuccari, F.; Ortenzi, F.; Genovese, A.; Spazzafumo, G.; Nardone. Energy consumption of a last generation full hybrid vehicle compared with a conventional vehicle in real drive conditions. *Energy Procedia* **2018**, *148*, 289–296. [\[CrossRef\]](#)
8. Gustafsson, M.; Svensson, N.; Eklund, M.; Möller, B. Well-to-wheel climate performance of gas and electric vehicles in Europe. *Transp. Res. Part D Transp. Environ.* **2021**, *97*, 102911. [\[CrossRef\]](#)
9. Elgowainy, A.; Han, J.; Poch, L.; Wang, M.; Vyas, A.; Mahalik, M.; Rousseau, A. *Well-to-Wheels Analysis of Energy Use and Greenhouse Gas Emissions of Plug-In Hybrid Electric Vehicles*; Argonne National Lab. (ANL): Argonne, IL, USA, 2010. [\[CrossRef\]](#)
10. Genovese, A.; Ortenzi, F.; Villante, C. On the energy efficiency of quick DC vehicle battery charging. *World Electr. Veh. J.* **2015**, *7*, 570–576. [\[CrossRef\]](#)
11. Edwards, R.; Rose, K.; Nelson, R.; Hamje, H.; Godwin, S.; Reid, A.; Maas, H.; Lonza, L.; Hass, H.; Krasenbrink, A.; et al. *Well-To-Wheels Analysis of Future Automotive Fuels and Powertrains in the European Context*; Publications Office of the European Union: Luxembourg, 2014. [\[CrossRef\]](#)

12. Cirillo, M. Parametri Standard Nazionali. 2018. Available online: [https://www.mite.gov.it/sites/default/files/archivio/allegati/emission\\_trading/tabella\\_coefficienti\\_standard\\_nazionali\\_11022019.pdf](https://www.mite.gov.it/sites/default/files/archivio/allegati/emission_trading/tabella_coefficienti_standard_nazionali_11022019.pdf) (accessed on 22 December 2021).
13. Caputo, A. Fattore di Emissione Atmosferica di a Effetto gas Serra nel Settore Elettrico Nazionale e nei Principali Paesi Europei. 2020; ISBN 978-88-448-0992-8. Available online: [https://www.isprambiente.gov.it/files2020/pubblicazioni/rapporti/Rapporto317\\_2020.pdf](https://www.isprambiente.gov.it/files2020/pubblicazioni/rapporti/Rapporto317_2020.pdf) (accessed on 20 December 2021).
14. De Gennaro, M.; Paffumi, E.; Martini, G.; Manfredi, U.; Vianelli, S.; Ortenzi, F.; Genovese, A. Experimental Test Campaign on a Battery Electric Vehicle: On-Road Test Results (Part 2). In Proceedings of the SAE 2015 World Congress & Exhibition, Detroit, MI, USA, 21–23 April 2015. [CrossRef]
15. Alessandrini, A.; Filippi, F.; Ortenzi, F. Consumption calculation of vehicles using OBD data. In Proceedings of the International Emission Inventory Conference, Tampa, FL, USA, 13–16 August 2012.
16. Lee, C.; Öberg, P. *Classification of Road Type and Driving Style Using OBD Data*; SAE Technical Papers; SAE: Warrendale, PA, USA, 2015. [CrossRef]
17. ISFORT. 17° Rapporto Sulla Mobilità Degli Italiani. 25 November 2020. Available online: <https://www.isfort.it/wp-content/uploads/2020/12/RapportoMobilita2020.pdf> (accessed on 15 January 2022).
18. Audimob. 2019. Available online: <https://www.isfort.it/ricerca/audimob/> (accessed on 15 January 2022).
19. Fontaras, G.; Zacharo, N.-G.; Ciuffo, B. Fuel consumption and CO<sub>2</sub> emissions from passenger cars in Europe—Laboratory versus real-world emissions. *Prog. Energy Combust. Sci.* **2017**, *60*, 91–131. [CrossRef]
20. Tsokolis, D.; Tsiakmakis, S.; Dimaratos, A.; Fontaras, G.; Pistikopoulou, P.; Ciuffo, B.; Samaras, Z. Fuel consumption and CO<sub>2</sub> emissions of passenger cars over the New Worldwide Harmonized Test Protocol. *Appl. Energy* **2016**, *179*, 1152–1165. [CrossRef]
21. Galvin, R. Energy consumption effects of speed and acceleration in electric vehicles: Laboratory case studies and implications for drivers and policymakers. *Transp. Res. Part D Transp. Environ.* **2017**, *53*, 234–248. [CrossRef]
22. Ntziachristos, L.; Samaras, Z.; European Environment Agency (EEA). *EMEP/EEA Air Pollutant Emission Inventory Guidebook 2016—Update July 2018*; Publications Office of the European Union: Luxembourg, 2018. Available online: <https://www.eea.europa.eu/themes/air/air-pollution-sources-1/emep-eea-air-pollutant-emission-inventory-guidebook> (accessed on 27 November 2021).
23. Crauser, J.-P.; Maurin, M.; Joumard, R. Representative Kinematic Sequences for the Road Traffic in France. *J. Passeng. Cars* **1989**, *98*, 1011–1018.
24. Cignini, F.; Alessandrini, A.; Orecchini, F.; Santiangeli, A.; Zuccari, F.; Ortenzi, F. A statistical analysis to compare results of different on-road vehicle performance testing. *Transp. Res. Part D* **2022**, *107*, 103281. [CrossRef]
25. Tartaglia, M. *L'inquinamento Dell'aria da Traffico Stradale. Analisi, Calcolo, Valutazione*; Bios: Cosenza, Italia, 1999; ISBN 9788877402707.
26. Kenworthy, J.R. *Driving Cycles, Urban Form and Transport Energy*. Ph.D. Thesis, Murdoch University, Singapore, 1986. Available online: <https://researchrepository.murdoch.edu.au/id/eprint/125/> (accessed on 19 January 2022).
27. Ganji, B.; Kouzani, A.Z.; Trinh, H. Drive Cycle Analysis of the Performance of Hybrid Electric Vehicles. In Proceedings of the ICSEE 2010, Wuxi, China, 17–20 September 2010. [CrossRef]
28. Kent, J.H.; Allen, G.H.; Rule, G. A driving cycle for Sydney. *Transp. Res.* **1978**, *12*, 147–152. [CrossRef]
29. Castelli, M. Quanto Tempo Servirà per Rinnovare il Parco Auto Circolante Italiano? *Fleet Magazine*, 25 October 2021. Available online: <https://www.fleetmagazine.com/parco-auto-circolante-italiano-tempi-rinnovamento/> (accessed on 10 January 2022).
30. ACI. Open Parco Veicoli. 2022. Available online: <http://www.opv.aci.it/WEBDMCircolante/> (accessed on 22 January 2022).
31. Unione petrolifera. Roadmap della Mobilità Sostenibile fino al 2030. 2016. Available online: [http://www.unem.it/wp-content/uploads/2017/02/Allegato-3\\_Posizione-UP-su-Tavolo-mobilit%C3%A0-sostenibile.pdf](http://www.unem.it/wp-content/uploads/2017/02/Allegato-3_Posizione-UP-su-Tavolo-mobilit%C3%A0-sostenibile.pdf) (accessed on 19 January 2022).
32. European Commission. Stepping Up Europe's 2030 Climate Ambition Investing in a Climate-Neutral Future for the Benefit of Our People. 17 September 2020. Available online: [https://ec.europa.eu/transparency/documents-register/detail?ref=SWD\(2020\)176&lang=en](https://ec.europa.eu/transparency/documents-register/detail?ref=SWD(2020)176&lang=en) (accessed on 15 December 2021).

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.